

TECHNICAL DATA SHEET

GASIR[®] Infrared Lens

3.9 mm f/1.1

Umicore's GASIR[®] infrared lenses have been developed for an easy fit with a wide range of camera cores. Our catalog lenses provide a cost-effective solution for high-resolution thermal imaging and sensing applications.

This lens may be offered with other coating variants upon request. Its **lightweight and cost-effective design** makes it a prime choice for your application.

This lens is compatible with **12 μm QVGA** detectors and smaller.



OPTICAL SPECIFICATIONS


Effective focal length	3.9 mm
Radiometric f-number	f/1.1
Waveband	8 – 12 μm
Maximum field of view	60° × 44°
Image circle	4.8 mm

Fields of view (HFOV × VFOV)

Detector pixel pitch	Detector format		
	80 × 80	160 × 120	320 × 240
12 μm	14.5° × 14.5°	29° × 22°	60° × 44°
17 μm	21° × 21°	42° × 31°	—

Other detectors may be possible. Please contact us for more information.

LENS VARIANTS

Mechanical variant	Fixed Focus 	
Mechanical interface	12 μm mount M18	
Coating option	HEAR	iDLC [™]
Part number	18092_100	22044_100

COATING OPTIONS

	Transmission*	Lens coatings	Comments
HEAR	> 97%	HEAR on all surfaces	Maximum transmission performance.
iDLC [™]	> 87%	iDLC [™] on front surface HEAR on all other surfaces	Durable coating for unprotected exterior use. Salt fog rated.

HEAR: High Efficiency Anti-Reflection; DLC: Diamond-Like Carbon

Additional specifications are provided in the coatings Technical Data Sheets available on our website.

*average transmission over waveband




GASIR® Infrared Lens – 3.9 mm f/1.1

Fixed Focus

Part Number HEAR 18092_100 iDLC™ 22044_100

Focus range	0.10 m to ∞ with 0.12 mm refocus
Operating temperature	-40 °C to +80 °C
Storage temperature	-57 °C to +105 °C
Solar radiation	MIL STD 810H Method 505.7 Procedure I-A1
Vibration	MIL STD 810H Method 514.8 / Procedure-I Cat. 20
Sealing	IP67
Weight	5.9 g
Housing material	Black anodized aluminium

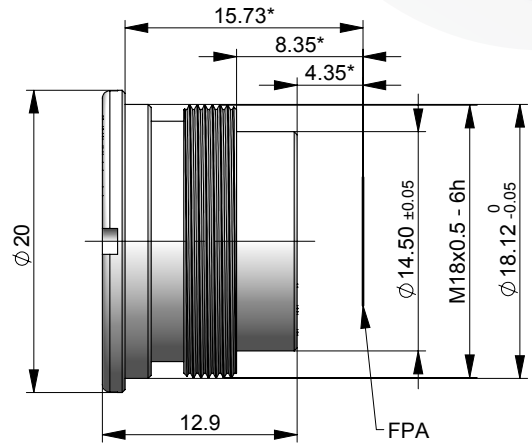

*dimensions valid with 0.63 mm Si detector window

Electro-Optic Materials is ISO certified: ISO 9001 & ISO 14001

Umicore IR Glass
Z.A. du Boulais
35690 Acigné
FRANCE

Tel: +33 2 99 04 32 26
Fax: +33 2 99 04 32 29
optics@umicore.com

Umicore Marketing Services
No. 1800 west Zhongshan Rd
200000 Shanghai
China

Tel: +86 21 2411 6972
Fax: +86 21 2411 6988
optics.cn@umicore.com

Umicore Optical Materials Inc.
PO Box 737
Quapaw, OK 74363
USA

Tel: +1 918-673-1650
Fax: +1 918-673-2121
optics.na@umicore.com