

TECHNICAL DATA SHEET

GASIR[®] Infrared Lens 19 mm f/1.2

Umicore's GASIR[®] infrared lenses have been developed for an easy fit with a wide range of camera cores. Our catalog lenses provide a cost-effective solution for high-resolution thermal imaging and sensing applications.

This passively athermalized infrared lens is suitable for use with detectors up to 25 μm QVGA detectors. Its medium field of view makes it well-suited for thermal imaging applications.



OPTICAL SPECIFICATIONS


Effective focal length	18.8 mm
Radiometric f-number	f/1.2
Waveband	8 – 12 μm
Maximum field of view	28° × 21°
Image circle	12.0 mm

Fields of view (HFOV × VFOV)

Detector pixel pitch	Detector format	
	160 × 120	320 × 240
17 μm	8.2° × 6.2°	16.3° × 12.3°
25 μm	12.1° × 9.1°	24° × 17.9°

Other detectors may be possible. Please contact us for more information.

LENS VARIANTS

Mechanical variant	Fixed Focus 	
Mechanical interface	Standard M25	
Coating option	iDLC [™]	HEAR
Part number	10038_100	14024_100

COATING OPTIONS

	Transmission*	Lens coatings	Comments
iDLC [™]	> 87%	iDLC [™] on front surface HEAR on all other surfaces	Durable coating for unprotected exterior use. Salt fog rated.
HEAR	> 94%	HEAR on all surfaces	Maximum transmission performance.

HEAR: High Efficiency Anti-Reflection; DLC: Diamond-Like Carbon

Additional specifications are provided in the coatings Technical Data Sheets available on our website.

*average transmission over waveband




GASIR® Infrared Lens – 19 mm f/1.2

Fixed Focus

Part Number iDLC™ 10038_100 HEAR 14024_100

Focus range	0.6 m to ∞ with 0.57 mm refocus
Operating temperature	-40 °C to +80 °C
Storage temperature	-57 °C to +105 °C
Solar radiation	MIL-STD-810G Method 505.5
Vibration	MIL-STD-810E Method 514.4 / procedure I, Cat. 8
Mechanical shock	MIL-E-5400T
Sealing	IP67
Weight	29 g
Housing material	Black anodized aluminium

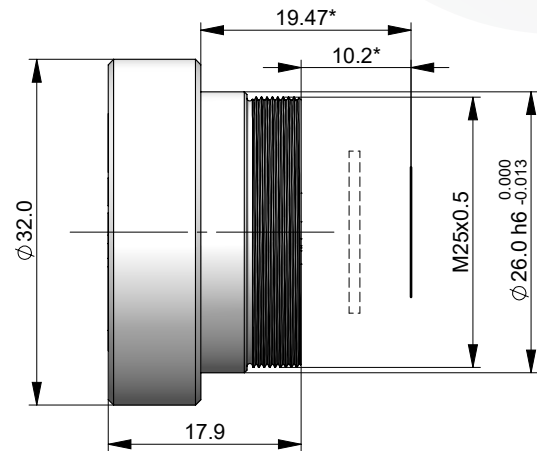

*dimensions valid with 1.0 mm Ge detector window

Electro-Optic Materials is ISO certified: ISO 9001 & ISO 14001

Umicore IR Glass
Z.A. du Boulais
35690 Acigné
FRANCE

Tel: +33 2 99 04 32 26
Fax: +33 2 99 04 32 29
optics@umicore.com

Tel: +1 918-673-1650
Fax: +1 918-673-2121
optics.na@umicore.com

Umicore Optical Materials Inc.
PO Box 737
Quapaw, OK 74363
USA