

TECHNICAL DATA SHEET

GASIR[®] Infrared Lens

10 mm f/1.2

Umicore's GASIR[®] infrared lenses have been developed for an easy fit with a wide range of camera cores. Our catalog lenses provide a cost-effective solution for high-resolution thermal imaging and sensing applications.

This passively athermalized infrared lens is suitable for use with detectors up to 25 μm QVGA detectors. Its medium wide field of view makes it well-suited for thermal imaging applications.



OPTICAL SPECIFICATIONS


| | |
|------------------------|----------------------|
| Effective focal length | 10.3 mm |
| Radiometric f-number | f/1.2 |
| Waveband | 8 – 12 μm |
| Maximum field of view | 55° × 41° |
| Image circle | 12.0 mm |

Fields of view (HFOV × VFOV)

| Detector pixel pitch | Detector format | |
|----------------------|-----------------|-------------|
| | 160 × 120 | 320 × 240 |
| 12 μm | 10.7° × 8.0° | 21° × 16.0° |
| 17 μm | 15.2° × 11.4° | 30° × 23° |
| 25 μm | 22° × 16.7° | 45° × 34° |

Other detectors may be possible. Please contact us for more information.

LENS VARIANTS

| | | |
|----------------------|--|-------------------|
| Mechanical variant | Fixed Focus  | |
| Mechanical interface | Standard M25 | |
| Coating option | HEAR | iDLC [™] |
| Part number | 11164_100 | 11165_100 |

COATING OPTIONS

| | Transmission* | Lens coatings | Comments |
|-------------------|---------------|--|---|
| HEAR | > 94% | HEAR on all surfaces | Maximum transmission performance. |
| iDLC [™] | > 87% | iDLC [™] on front surface HEAR on all other surfaces | Durable coating for unprotected exterior use. Salt fog rated. |

HEAR: High Efficiency Anti-Reflection; DLC: Diamond-Like Carbon

Additional specifications are provided in the coatings Technical Data Sheets available on our website.

*average transmission over waveband




GASIR® Infrared Lens – 10 mm f/1.2

Fixed Focus

Part Number HEAR 11164_100 iDLC™ 11165_100

| | |
|-----------------------|---|
| Focus range | 0.5 m to ∞ with 0.19 mm refocus |
| Operating temperature | -40 °C to +80 °C |
| Storage temperature | -57 °C to +105 °C |
| Solar radiation | MIL-STD-810G Method 505.5 |
| Vibration | MIL-STD-810E Method 514.4 / procedure I, Cat. 8 |
| Mechanical shock | MIL-E-5400T |
| Sealing | IP67 |
| Weight | 28 g |
| Housing material | Black anodized aluminium |

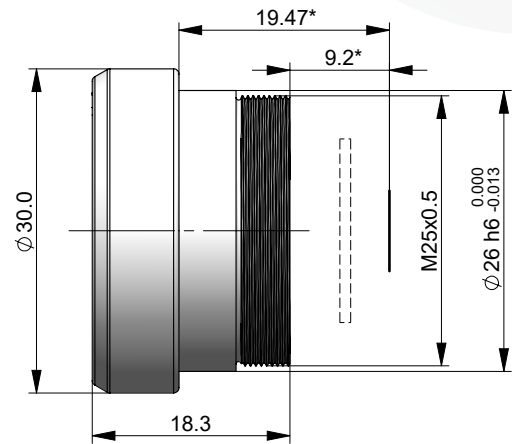

*dimensions valid with 1.0 mm Ge detector window

Electro-Optic Materials is ISO certified: ISO 9001 & ISO 14001

Umicore IR Glass
Z.A. du Boulais
35690 Acigné
FRANCE

Tel: +33 2 99 04 32 26
Fax: +33 2 99 04 32 29
optics@umicore.com

Tel: +1 918-673-1650
Fax: +1 918-673-2121
optics.na@umicore.com

Umicore Optical Materials Inc.
PO Box 737
Quapaw, OK 74363
USA