

TECHNICAL DATA SHEET

GASIR[®] Infrared Lens

7.2 mm f/1.0

Umicore's GASIR[®] infrared lenses have been developed for an easy fit with a wide range of camera cores. Our catalog lenses provide a cost-effective solution for high-resolution thermal imaging and sensing applications.

This lens may be offered with other coating variants upon request. Its **lightweight and distortion free design** makes it a prime choice for your application.

This lens is compatible with **12 μm QVGA** detectors and smaller.



OPTICAL SPECIFICATIONS

Effective focal length	7.2 mm
Radiometric f-number	f/1.0
Waveband	8 – 12 μm
Maximum field of view	31° × 24°
Image circle	5.0 mm

Fields of view (HFOV × VFOV)

Detector pixel pitch	Detector format		
	80 × 80	160 × 120	320 × 240
12 μm	7.6° × 7.6°	15.2° × 11.4°	30° × 23°
17 μm	10.8° × 10.8°	21° × 16.2°	—
34 μm	21° × 21°	—	—

Other detectors may be possible. Please contact us for more information.

LENS VARIANTS

Mechanical variant	Fixed Focus 	
Mechanical interface	12 μm mount M18	
Coating option	iDLC [™]	HEAR
Part number	18070_100	19064_100

COATING OPTIONS

	Transmission*	Lens coatings	Comments
iDLC [™]	> 87%	iDLC [™] on front surface HEAR on all other surfaces	Durable coating for unprotected exterior use. Salt fog rated.
HEAR	> 94%	HEAR on all surfaces	Maximum transmission performance.

HEAR: High Efficiency Anti-Reflection; DLC: Diamond-Like Carbon

Additional specifications are provided in the coatings Technical Data Sheets available on our website.

*average transmission over waveband




GASIR® Infrared Lens – 7.2 mm f/1.0

Fixed Focus

Part Number iDLC™ 18070_100 HEAR 19064_100

Focus range	0.14 m to ∞ with 0.34 mm refocus
Operating temperature	-40 °C to +80 °C
Storage temperature	-57 °C to +105 °C
Weight	7.9 g
Housing material	Black anodized aluminium

*dimensions valid with 0.63 mm Si detector window

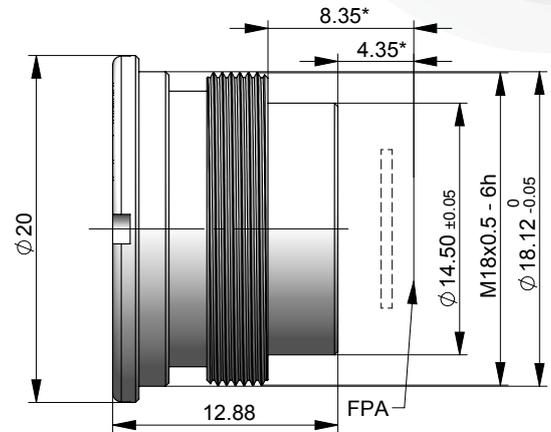

Electro-Optic Materials is ISO certified: ISO 9001 & ISO 14001

Umicore IR Glass
Z.A. du Boulais
35690 Acigné
FRANCE

Tel: +33 2 99 04 32 26
Fax: +33 2 99 04 32 29
optics@umicore.com

Tel: +1 918-673-1650
Fax: +1 918-673-2121
optics.na@umicore.com

Umicore Optical Materials Inc.
PO Box 737
Quapaw, OK 74363
USA